ADA EZ Pro Hardwire Instructions 700503 Rev A 05-23-13




1.1 Installing the Optional Plug-In Transformer

NOTE


An optional plug-in transformer is recommended in installations where the automatic door-opening feature will be used frequently and is required if the Power Close or Push and Go fetures are activated.

- 1.1.1 Route the extension wire from the wall outlet to the frame of the door.
- 1.1.2 Refer to Figure 1, and mount one door cord bracket to the face of the door behind the battery pack, mount the other door cord bracket to the frame of the door using the supplied mounting screws.

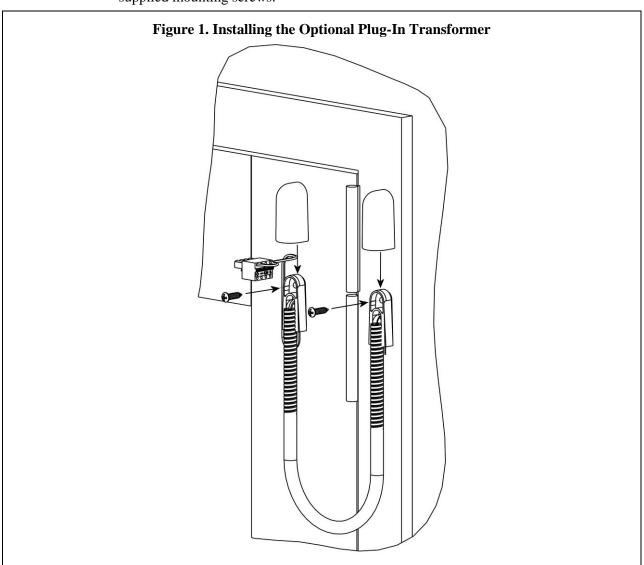

700503 Rev. A, 05/23/13 1 of 2

- 1.1.3 Refer to Figure 2 and plug in the power connector.
- 1.1.4 Refer to Figure 2 and install the battery wire cap.
- 1.1.5 Plug the transformer into the wall outlet and plut the extension into the transformer.
- 1.1.6 Refer to Figure 2 and ensure the switch on the battery pack is set to the "ON" position. Ensure the LED lights steady green. If the light does not light steady green, reverse the wires on the power connector.

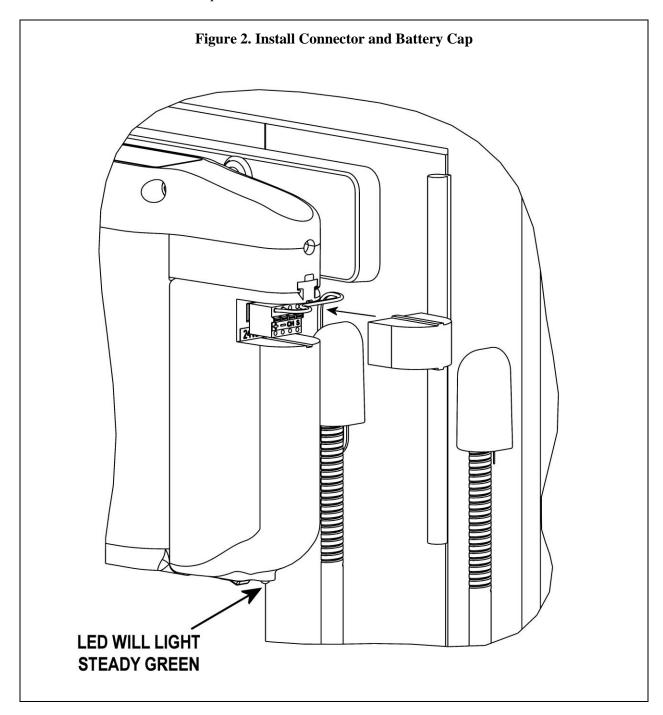

700503 Rev. A, 05/23/13 2 of 2